




TragenFlex

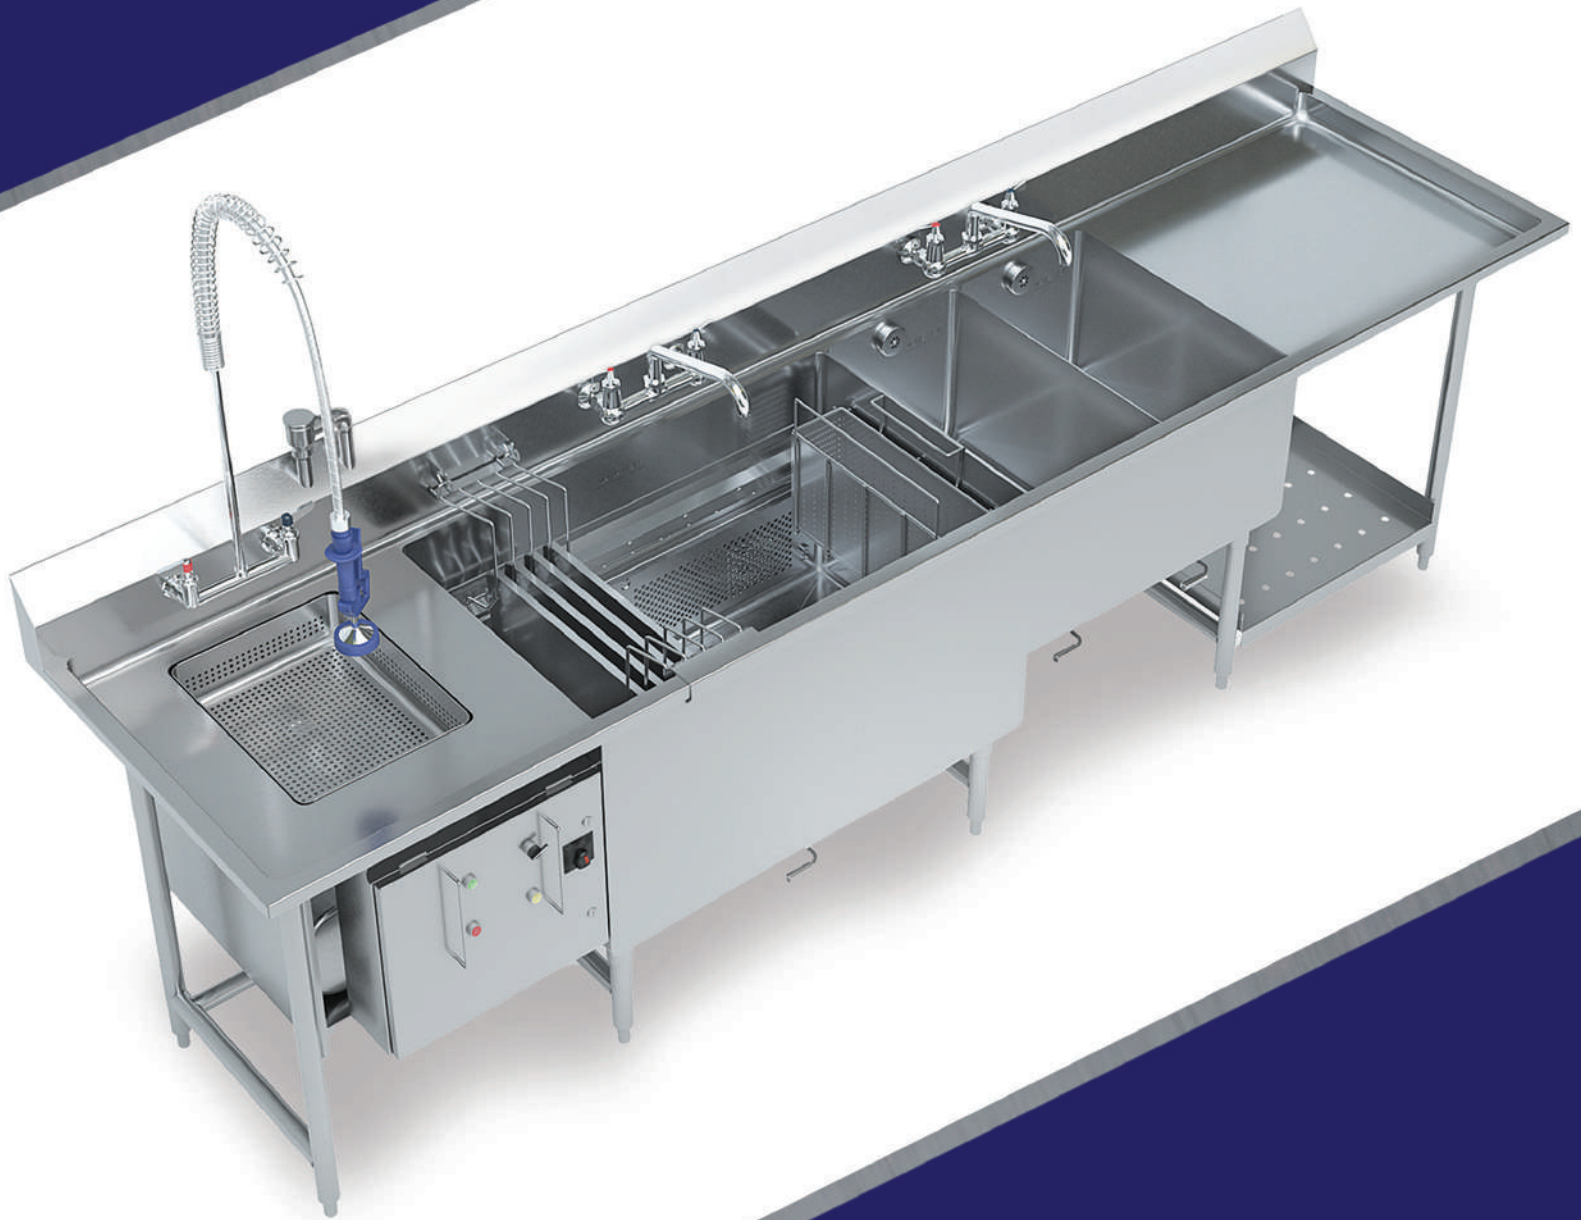

ULTRAWASH

**WE PUT THE POWER
IN THE DISHROOM SINK**

The Ultrawash System. Engineered for customization, cost savings and efficiency.

Ultrawash delivers an intense wash system that is suited for sheet pans, pots, and utensils. Water jets are spread at 6" increments to provide a forceful, continuous flow of hot and soapy water from back to front. The jets efficiently remove baked-on foods and provide clean dishware which is ideal for commercial kitchens.

★ LABOR SAVINGS ★

Make a fast return on investment with measurable labor cost savings when compared to a traditional 3 compartment sink.

1. CONTROL PANEL

Utilizing the latest technological components for programable wash features. Putting the controls in your hands – wash run times, can be adjusted in the field to suit your specific kitchens needs.

2. CONSTRUCTION

Superior quality heavy duty construction. Ultrawash table-top and sinks are fabricated with heavy duty 14 GA stainless steel. All sinks are fully welded with 3/4" radius corners. Understructure is 1-5/8" Ø stainless steel tubular support legs & cross braces, fully welded.



3. WASH JETS

The wash jets are strategically located in the back of the sink 6" apart to provide maximum water flow to remove the heavy soil and grease off the pots and pans.

4. PUMP MOTOR

Powered by an energy efficient pump motor, with stainless steel impeller and self draining. Creating a powerful whirling effect to meet your most demanding applications.

5. HEATER

Custom heating element maintains correct operating temperature providing optimum results.


Ultra-Configurations.

ULTRAWASH SYSTEM – INLINE

A centralized scrap area and sink allows for easy transfer of ware into a conveyor rack dishmachine with a large clean table area

Featuring:

- Powered pre-scrap collector with overhead pre-rinse faucet
- 32" powered wash sink
- 24" wash & sanitize sink w/removable rack guides
- Conveyor rack dish machine
- Clean dish roller table for quicker dried racks

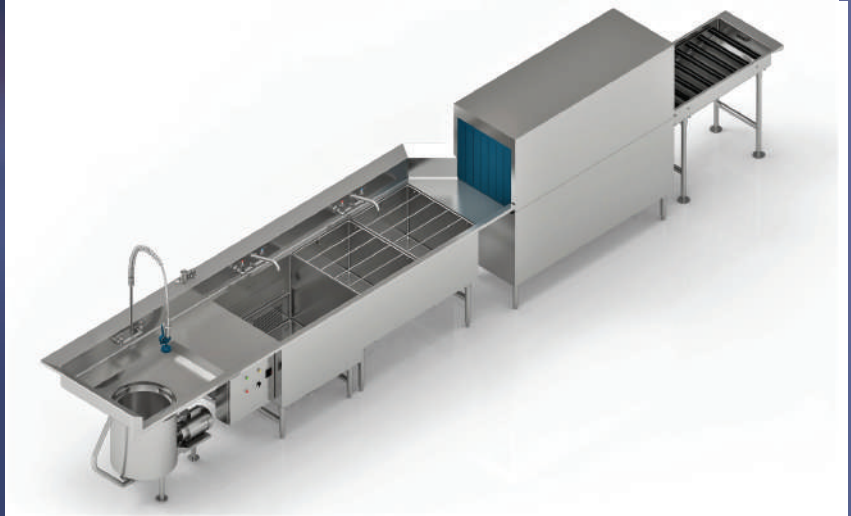


ULTRAWASH SYSTEM – CORNER UNIT

For tight spaces, the Ultrawash System and clean table easily connect to any corner type dish machine.

Featuring:

- 36" powered wash sink
- 24" wash & sanitize sink with removable rack guides
- Corner door type dish machine
- Large clean table with undershelf

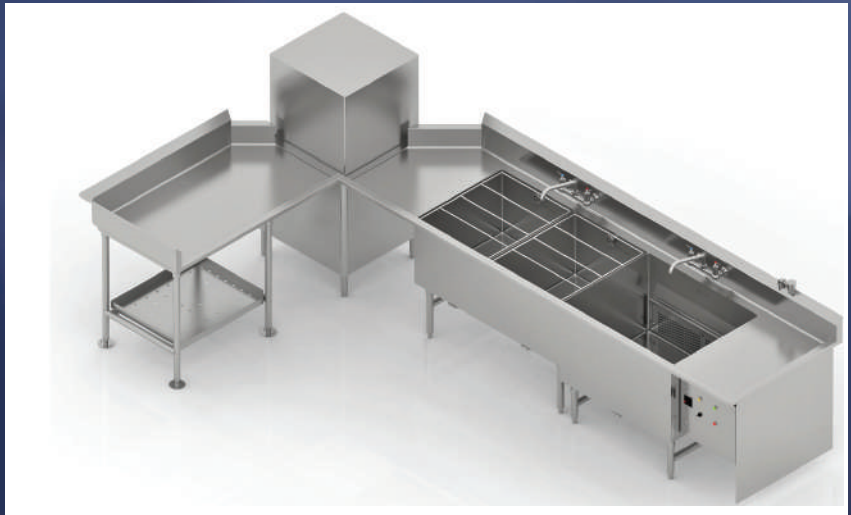

ULTRAWASH SYSTEM – FREE STANDING

Provisions to work seamlessly with waste equipment. (waste equipment furnished by others).

Featuring:

- Pre-rinse faucet
- 40" powered wash sink
- 18" wash & sanitize sink
- Spacious clean ware storage area with heavy duty undershelf



*Waste equipment and dish machines shown are third-party equipment to be furnished by others



ULTRAWASH SINK – ULTRAPOWEROUS

The Ultrawash Sink features an powerful energy-efficient pump motor with strategically located water jets in the wash sink that gush out a potent flow of heated water at 115°F. The powerful jets remove demanding heavy soiled foods from the sheet pans, pots and other utensils.

FRAME & STRUCTURE

- System custom configurable as per plans & specifications. (L or U-shaped designs available upon request.)
- 14-gauge stainless steel type 304 with #4 construction for tanks and drain boards.
- Pre-configured lengths from 96" to 120" in 6" increments, 34" front to back depth.
- 9-1/2" high x 2-1/2" wide backsplash.

SINK

- 2 HP wash pump motor (30"– 48" tank) with stainless steel impeller, pump housing and wash manifold.
- Stainless steel wash pump housing fully self-draining with no use of drain line or valve.
- Stainless steel wash pump intake to run full length of the rear of the wash tank below wash jets.

- 2kw - 7kw wash tank heater maintains wash tank temperature at 115° +/- 0.5°F
- Inherent motor overload protection, automatic reset.
- Dual liquid high and low water level sensors.
- 1-1/2" Ø drains, pre-rinse sprayer and faucets included.
- Sink front trim panel.

UNDERSTRUCTURE

- 1-5/8" Ø stainless steel tubular support legs and cross braces, fully welded.
- Stainless steel bullet feet.

CONTROLS

24V low voltage control circuit to include the following:

- Disconnect breaker and control panel.
- Auto wash water temperature control.
- Timed wash cycle and wash tank heat.

- 4-hour wash timer with reset.
- Auto shut-off protection for higher water, heater temperature, and low water level.

WARRANTY

- 1-year parts and labor warranty.

OPTIONS (AT ADDITIONAL COST)

- 480/60Hz/3 Phase electrical connection.
- Autofill (3/4" Ø hot water connection.)
- Table mounted over and undershelf.
- Sheet pan racking system.
- Utensil basket.

INSTALLATION REQUIREMENTS

- Single point 208-240V/60Hz/3Phase electrical connection (pre-wired by factory).
- 3/4" Ø Hot and cold water connections.
- 1-1/2" Ø Drain connections.