



ULTRAWASH SPECSHEET

Project Name: _____

Item No.: _____

Model No.: _____

Quantity: _____


Standard Features

1. Frame & Structure

- System custom configurable as per plans & and specifications. (L or U-shaped designs available upon request.)
- 14-gauge stainless steel type 304 with #4 construction for tanks and drain boards.
- 10" high x 2-3/4" wide backsplash.

2. Sink

- 2kw - 7kw wash tank heater maintains wash tank temperature at 115° +/- 0.5°F
- Inherent motor overload protection.
- Dual liquid high and low water level sensors.
- 1-1/2" Ø drains, pre-rinse sprayer and faucets included.
- Autofill (3/4" Ø hot water connection.)
- Sink front trim panel.
- Utensil basket.

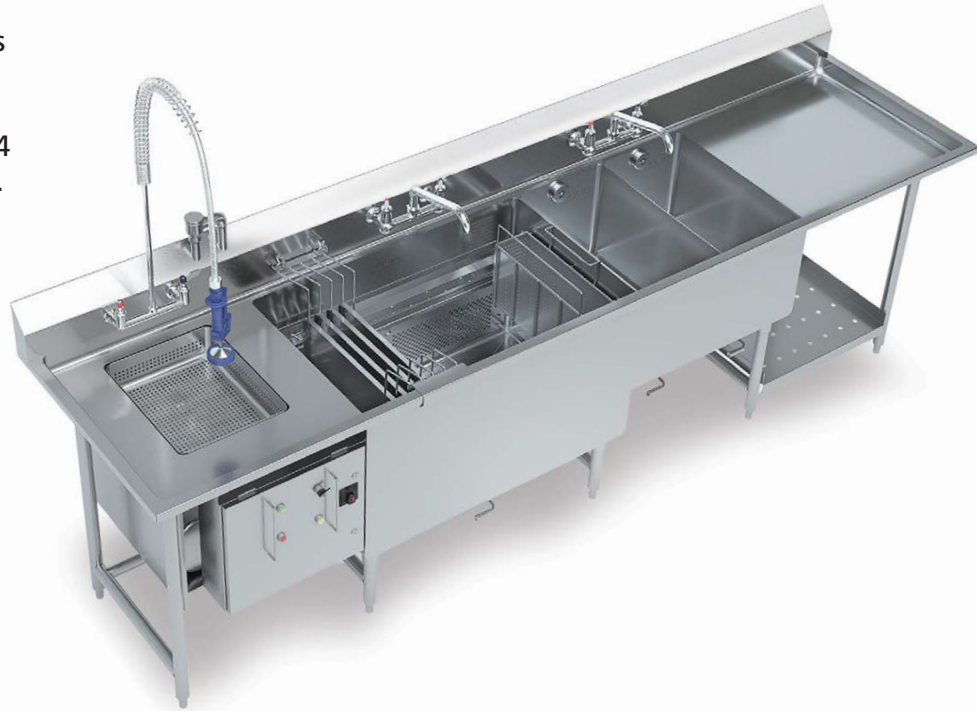

3. Understructure

- 1-5/8" Ø stainless steel tubular support legs and cross braces, fully welded.
- Stainless steel bullet feet.

4. Controls

24V low voltage control circuit to include the following:

- Main Disconnect Switch and Breakers inside the control panel.
- Auto wash tank water temperature control.
- Timed wash cycle and wash tank heat.
- 4-hour wash timer with reset.
- Auto shut-off protection for higher water, heater temperature, and low water level.

5. Options

- Table mounted over and undershelf.
- Sheet pan racking system.


6. Installation Requirements

- Single point 208-240V/480V/60Hz/3Phase electrical connection.
- 3/4" Ø Hot and cold water connections.
- 1-1/2" Ø Drain connections.

7. Warranty

1-year parts and labor warranty.



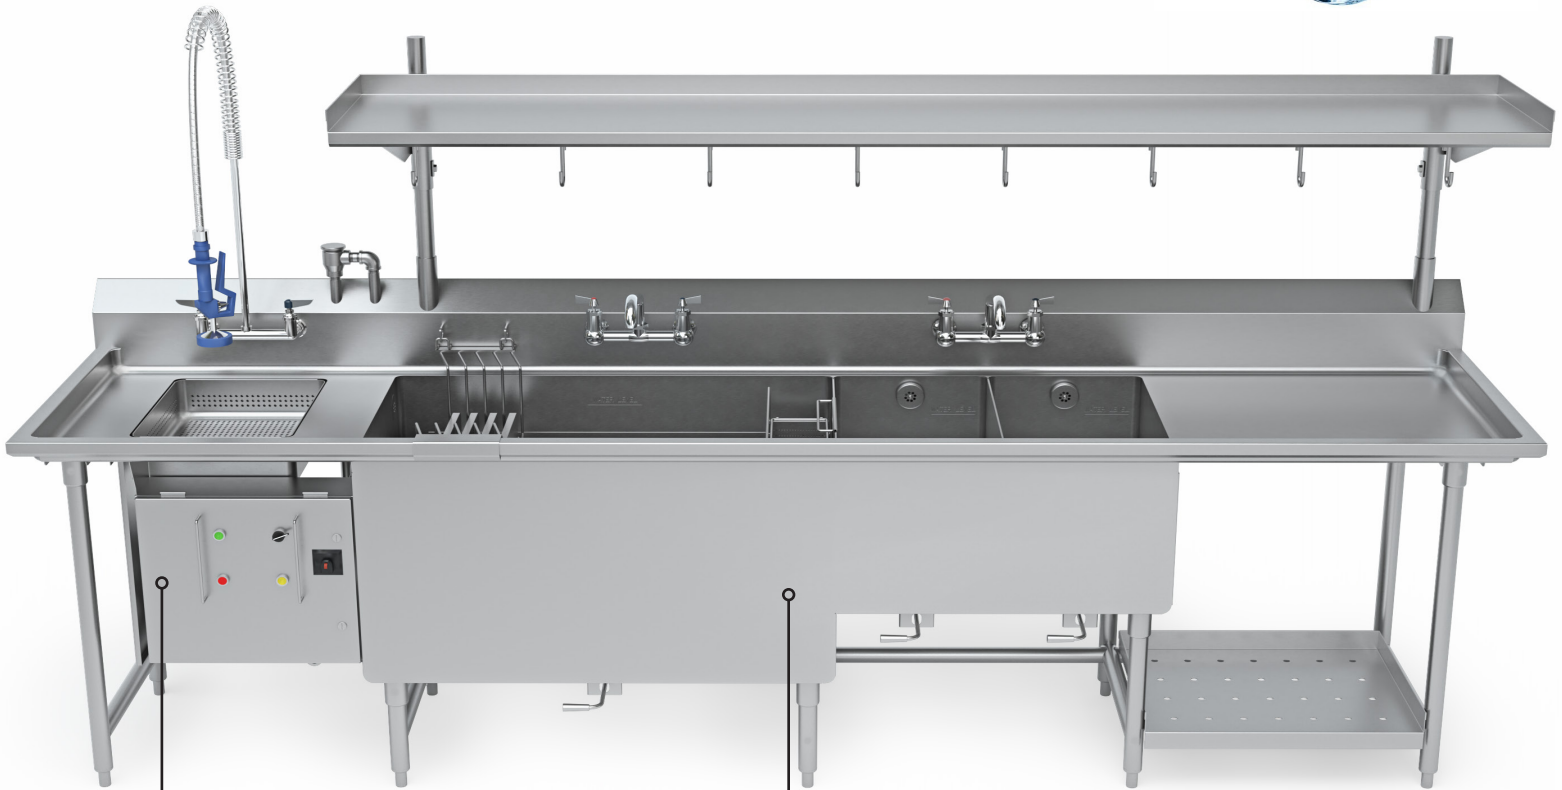

○ Wash Jets

The wash jets are strategically located in the back of the sink 6" apart to provide maximum water flow to remove the heavy soil and grease off the pots and pans.

○ Pump Motor

Powered by an energy efficient pump motor, with stainless steel impeller and self draining. Creating a powerful whirling effect to meet your most demanding applications.

○ Heater

Custom designed reliable heating element to maintain the water at correct operating temperature, giving you consistent and optimum results.

○ Construction

Superior quality heavy duty construction. Ultrawash table-top and sinks are fabricated with heavy duty 14 GA stainless steel. All sinks are fully welded with 3/4" radius corners. Understructure is 1-5/8" Ø stainless steel tubular support legs & cross braces, fully welded.

○ Control Panel

Utilizing the latest technological components for programmable wash features. Putting the controls in your hands – wash run times, can be adjusted in the field to suit you specific kitchens needs.

○ Understructure

1-5/8" Ø stainless steel tubular support legs with options of bullet or flanged feet Construction

Configurator Sheet



Project Name: _____

City: _____ Unit Overall Length: _____

State: _____ Length Of Largest Piece: _____

Dishwasher Connection


- DOOR-TYPE
- RACK CONVEYOR

Add-ons

- OVER SHELF
- FLANGED FEET
- UNDER SHELF
- SHEET PAN RACKS

Direction

- L-R
- R-L

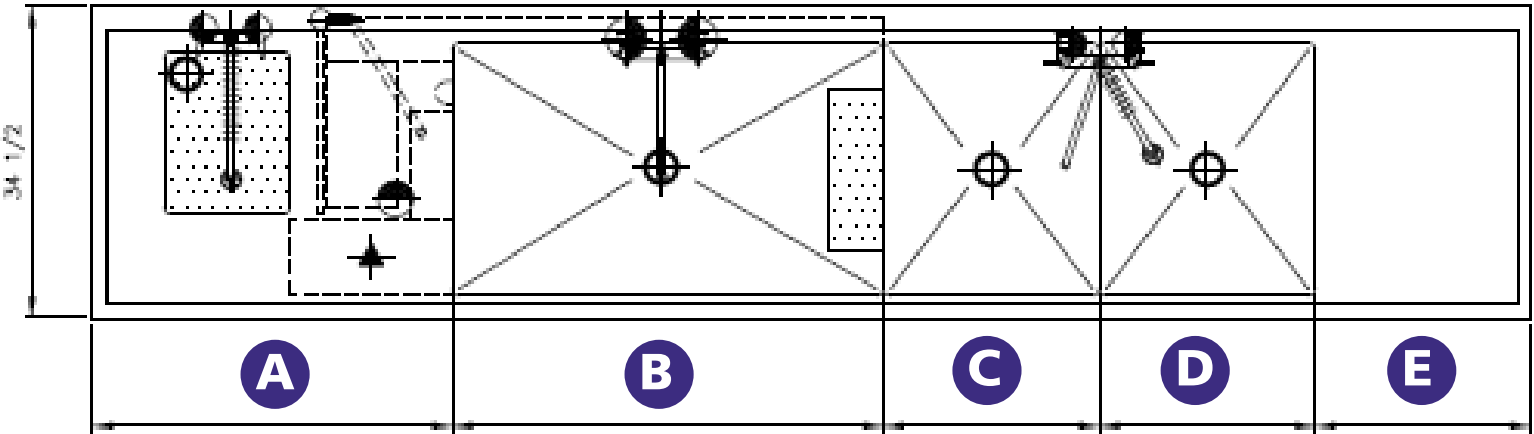

A SOILED END DRAIN BOARD

- 20" 22" 24"
- 30" 36" 42"
- 48" 54" 60"

OPTIONS:

- PRE-RINSE W/FAUCET
- PRE-RINSE FAUCET
- SCRAP SINK DISH RACK SCRAP SINK

DISPOSER:

MAKE: _____ MODEL: _____

WASTE COLLECTOR:

MAKE: _____ MODEL: _____

B WASH SINK (WASH TANK SINK DEPTH IS 21")

(CHOOSE SHEET PAN CAPACITY

- 30" 4 8
- 36" 4 8 12
- 42" 4 8 12 16
- 48" 4 8 12 16
- 54" 4 8 12 16 20
- 60" 4 8 12 16 20 24
- 66" 4 8 12 16 20 24 28
- 72" 4 8 12 16 20 24 28

C RINSE SINK (RINSE SINK DEPTH IS 18")

- 15" 18" 20"
- 24" 30" 36"

D SANITIZE SINK (SANITIZE SINK DEPTH IS 18")


- 15" 18" 20"
- 24" 30" 36"

HATCO HEATER


E CLEAN END DRAIN BOARD

- 12" 36"
- 18" 42"
- 20" 48"
- 24" 54"
- 30" 60"

CONSTRUCTION DETAILS & DIMENSIONS

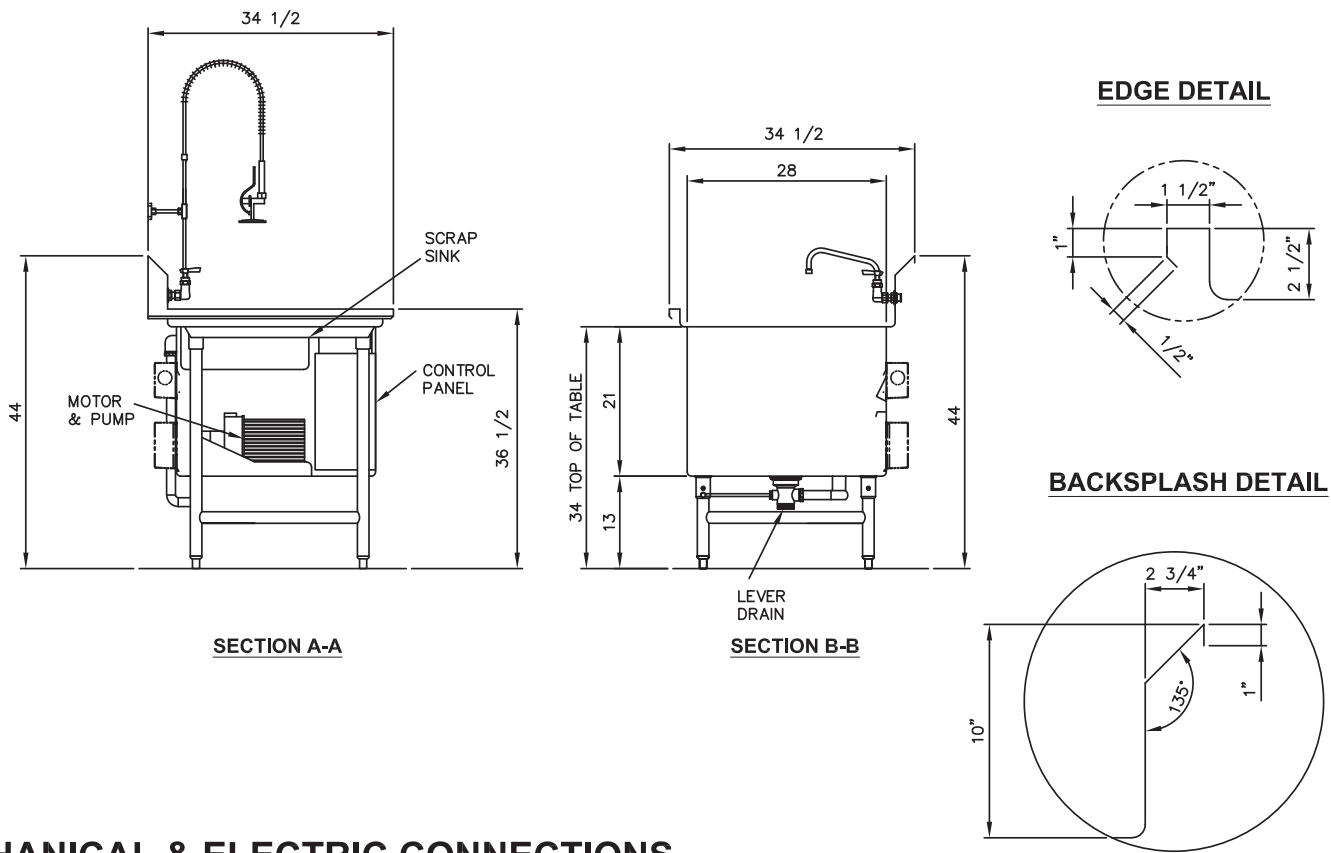

MECHANICAL & ELECTRIC CONNECTIONS

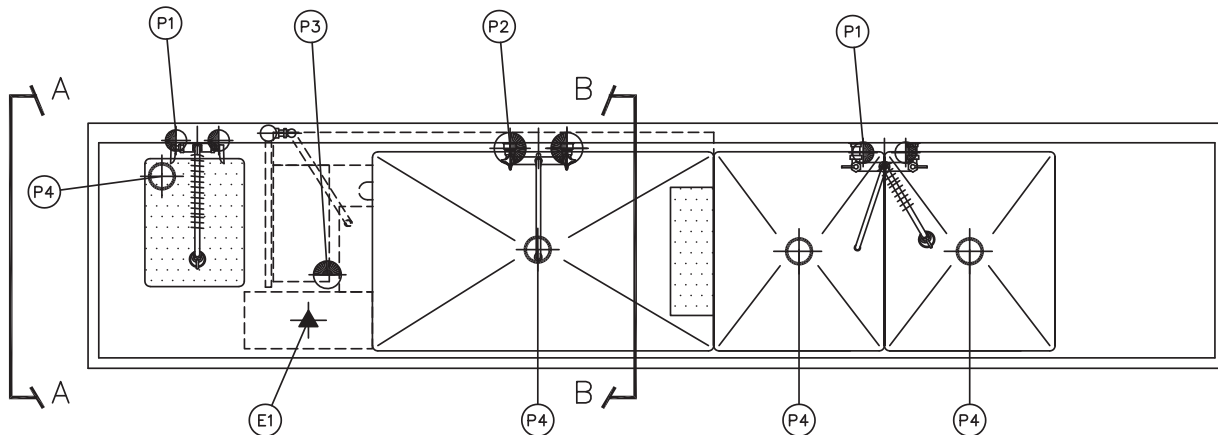

ELECTRICAL REQUIREMENTS

WASH SINK LENGTH	ULTRAWASH CAPACITY	ULTRAWASH MOTOR CAPACITY	POWER RATING	SELECTOR
LESS THAN 48"	1.5 HP MOTOR	2KW HEATER	208V/3Ø/20A/60HZ 480V/3Ø/15A/60HZ	<input type="checkbox"/>
		NO HEATER	208V/3Ø/15A/60HZ 480V/3Ø/15A/60HZ	<input type="checkbox"/>
LIES BETWEEN 48" TO 60"	2.7 HP MOTOR	2KW HEATER	208V/3Ø/30A/60HZ 480V/3Ø/20A/60HZ	<input type="checkbox"/>
		NO HEATER	208V/3Ø/15A/60HZ 480V/3Ø/15A/60HZ	<input type="checkbox"/>
MORE THAN 60"	2.7 HP MOTOR	7KW HEATER	208V/3Ø/60A/60HZ 480V/3Ø/40A/60HZ	<input type="checkbox"/>

PLUMBING & ELECTRICAL CONNECTIONS

P1	1/2" DIA. HOT & COLD WATER SUPPLY
P2	3/4" DIA. HOT & COLD WATER SUPPLY
P3	3/4" DIA. W/ AUTOFILL HOT WATER LINE
P4	1 1/2" DIA. DRAIN
E1	ULTRAWASH ELECTRIC POWER